

# SUPER PHOS



## FOOD PLANT AND EQUIPMENT DE-SCALER

CODE: E08

**LOW FOAM AND NON TAINING •  
DE-RUSTS • DE-SCALES • PROTECTS •  
CLEANS ALUMINIUM AND BRIGHT METALS**

### RECOMMENDED USE

Bain maries, kettles, steamers, water boilers, dish washing machines, water control valves, CIP pipe work, stainless steel, aluminium, concrete, tiles and glass.

#### USE FOR:

Rust and oxide contamination removal, inorganic and hard water deposits.

### DIRECTIONS FOR USE

Can be used as supplied or diluted with hot or cold water.

**CIP Cleaning:** Dilute up to 100:1. Flush system with SUPER PHOS solution and allow up to 4 hours for cleaning and de scaling.

**Heavy deposits:** Use neat or dilute up to 5:1

**General de-scaling:** dilute up to 50:1

**Light Duty de-scaling:** dilute up to 100:1

#### FOR DE-SCALING CONTAINERS

First apply SUPER PHOS undiluted to the areas of scale build-up. Then fill the container with water and leave to soak for up to 4 hours, depending on the level of scale build-up. Remove liquid and rinse thoroughly.



### PACK SIZES




### HEALTH + SAFETY


**EYES:** Rinse splashes to eyes, wash with water immediately.

**PPE:** Wear protective gloves (Acid resistant).  
If splashes are likely to occur wear glasses.

For full Health & Safety information refer to the Safety Data Sheet.

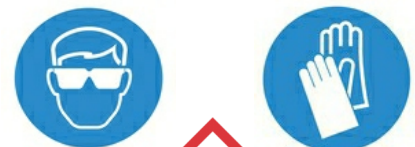

pH CONCENTRATE



IN USE  
RISK LEVEL

PARAGON PRODUCTS (UK) LTD, EAST LOTHIAN EH21 6SY

Tel 0131 653 2222. sales@paragononline.co.uk

www.paragongroup.co.uk

CODE: E08 10-15

