

POWER KLENZE

NON-CAUSTIC DETERGENT POWDER



CODE: F34

**SAFE FOR ALL ALUMINIUM EQUIPMENT •
EFFECTIVELY REMOVES STUBBORN VEGETABLE
OIL AND CARBONISED DEPOSITS**

RECOMMENDED USE

Food production equipment, deep fat fryers, cookers, grills, fat traps, drains. Soak tank de-carbonising, grease traps, ventilation filters

USE FOR:

Carbonised grease & food oil removal, Deep cleaning degreaser for concrete and tiled floors.

DIRECTIONS FOR USE

Fat fryer: Drain off old fat and refill with warm water.
Add Power Klenze at 25gms per litre.

Bring solution to the boil then immerse baskets and utensils. Allow to soak for approximately 15-30 minutes until grease deposits dissolve.
Drain off and rinse thoroughly with clean water

Heated soak tanks: Add 25gms per litre and heat solution to 65-75 °C and allow 30 minutes - 5 hours depending on soiling.

Power Klenze can also be used as a powerful degreaser on concrete and tiled floor areas to remove grease and heavy soiling.

CAUTION: This is a professional strength product and must be treated with utmost care. Read all product instructions carefully before use.
Always wear protective clothing.



PACK SIZES






HEALTH + SAFETY

EYES: Rinse splashes to eyes, wash with water immediately.

PPE: Wear protective gloves (Alkali resistant). And eye protection.

For full Health & Safety information refer to the Safety Data Sheet.

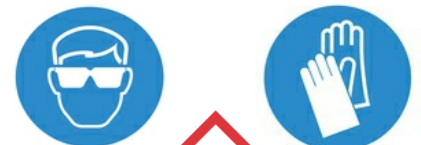

IN USE
RISK LEVEL



PARAGON PRODUCTS (UK) LTD, EAST LOTHIAN EH21 6SY
Tel 0131 653 2222. sales@paragononline.co.uk
www.paragongroup.co.uk

CODE: F34 10-15

